MGG 01 995001

Tufleated 2220

LAMONT GEOLOGICAL OBSERVATORY of COLUMBIA UNIVERSITY

Palisades, New York

1)0

ACOUSTIC PROVINCES

of the

NORTH PACIFIC

BASED ON DEEP-SEA CORES

A Preliminary Survey

by

D. R. Horn, B. M. Horn, and M. N. Delach

see Napis 70-0954 for sediment analysis

Technical Report No. 3 CU-3-67 NAVSHIPS N00024-67-C-1186

December 1967

01995001

Lamont Geological Observatory of Columbia University

Palisades, New York

ACOUSTIC PROVINCES OF THE NORTH PACIFIC BASED ON DEEP-SEA CORES

A PRELIMINARY SURVEY

by

D. R. Horn, B. M. Horn, and M. N. Delach

Technical Report No. 3

CU-3-67 NAVSHIPS N00024-67-C-1186

December 1967

MCG 01 9950011

CONTENTS

	Page
Introduction	1
Methods	5
Surficial sediment distribution of the North Pacific and its bearing on the acoustic properties of the sea floor	6
Distribution of sub-bottom reflectors and acoustic provinces of the North Pacific	12
Janan Acquetic Province	12
Japan Acoustic Province	15
Central North Pacific Acoustic Province	16
Aleutian-Alaska Acoustic Province	17
Conclusions	18
Acknowledgments	19
Appendix-Grain size data	20
References	38
ILLUSTRATIONS	
Figure	Page
l. Submarine physiographic provinces of the	· ·
northern Pacific and location of coring stations	3
2. Mean grain size of surficial sediments-northern Pacific	7
3. Mean size versus sediment sound velocity through cores	10
4. Acoustic provinces of the northern Pacific based on deep-sea cores	13
5. Area 1 - Japan Acoustic Province	pocket
6. Area 2 - Central North Pacific Acoustic Province.	pocket
7. Area 3 - Aleutian-Alaska Acoustic Province	nocket

INTRODUCTION

This report is a preliminary survey of 26l sediment cores collected north of 20 degrees latitude in the Pacific Ocean (see fig. 1 for location of coring stations). An additional 50 cores will be incorporated into the study prior to its completion in late 1968. The object of the investigation is to provide data which can be employed in the prediction of sound reflection and/or absorption by the sea floor of the North Pacific.

It is known that certain bulk and textural properties of marine sediments have a direct bearing on the speed at which sound travels through these materials (Hamilton, 1956; Hamilton and others, 1956; Shumway, 1956, 1960a, 1960b; Sutton and others, 1957; Nafe and Drake, 1957, 1961, 1963; Schreiber, 1966, 1967a, 1967b, 1967c, 1968; Horn, 1967; Horn and others, 1967a, 1967b, 1968). In turn, sediment layers which have high velocity characteristics are good reflectors, whereas those with low velocity properties absorb rather than reflect sound. The problem at hand then is to delineate the areas of the sea floor where reflectors or "absorbers" exist. In this survey the reflectors most commonly encountered are either turbidites (sand or coarse-grained silt deposited in deep water by turbidity currents) or ash (coarse-

grained silt consisting of volcanic glass). These reflectors are restricted to a zone which follows the continental borders and extends 200 to 600 miles seaward. Beyond the regions where reflectors occur are vast areas where only deep-sea clays have been accumulating on the sea floor. Sound travels through these deposits at lower speeds than through the overlying water; there is little velocity contrast at the sediment - water interface, and the sound is absorbed rather than reflected at the sea floor.

An inspection of the cores reveals that the North Pacific can be divided into regions with distinct acoustic properties. First, areas can be distinguished where sub-bottom reflectors are either present or absent. Second, in those areas where reflectors do occur, it is possible to identify provinces in which a common set of properties occurs.

In this report, the large area where sub-bottom reflectors are extremely rare is named the CENTRAL NORTH PACIFIC ACOUSTIC PROVINCE. East of Japan, the Kuril Islands, and the Kamchatka Peninsula, the cores contain multiple sub-bottom reflectors composed of ash. The latter is confined to a zone that parallels the coastlines and is referred to as the JAPAN ACOUSTIC PROVINCE. Off the Aleutians, Alaska, and British Columbia, there is another belt where reflectors are common.

This area of the sea floor is tentatively named the ALEUTIAN-ALASKA ACOUSTIC PROVINCE. Near the Aleutian Islands, turbidites and ash offer good reflectors, whereas south of the Gulf of Alaska and west of British Columbia turbidites dominate. In subsequent reports it will be necessary to break down the Aleutian-Alaska Acoustic Province into subprovinces, because the subbottom reflectors have different properties and are restricted in aerial extent.

METHODS

At sea, the cores are extruded and shipboard geologists describe their lithology. Shear strengths are taken down the length of the cores using a fall-cone penetrometer (Hansbo, 1957), the number of readings depending upon the complexity of layering, texture, etc. Bulk property samples are collected from the freshly extruded cores using a plastic syringe which contains a small rubber-headed piston. These samples are placed in plastic vials, tightly sealed, and shipped to the laboratory. At Lamont, the following raw data are determined from the bulk property samples: 1) wet weight, 2) wet volume, 3) dry weight, and 4) dry volume. From this information the porosity, moisture content, wet and dry densities, and void ratio of each sample are

calculated.

When the oceanographic vessels return to Lamont, sound velocities are measured on those cores which are well preserved. The speeds at which sound travels through the cores are determined using a sediment velocimeter (Underwater Systems, Inc., Velocimeter Model No. 201A). The cores are split into halves, tagged, and photographed. Geologists redescribe the cores with emphasis placed on defining acoustic reflectors. Samples representative of the various layers in the cores are taken and analyzed for texture according to the procedure outlined by Folk (1965).

In this preliminary report the results of textural analysis of the tops of the cores are given along with maps showing the location and thickness of acoustic reflectors. In later reports, the results of detailed core analyses will be given.

SURFICIAL SEDIMENT DISTRIBUTION IN
THE NORTH PACIFIC AND ITS BEARING ON
THE ACOUSTIC PROPERTIES OF THE SEA FLOOR

The tops of all cores from the North Pacific have been analyzed for texture. The results are presented in two ways:

1) mean grain size has been plotted on figure 2 and contoured at a 1 micron interval; and 2) mean grain size, standard deviation

(sorting), skewness, and transformed kurtosis are listed in the Appendix.


Mean grain size is the most important textural parameter of the four presented. There is a strong correlation between this property and the speed at which sound travels through a sediment (fig. 3). Therefore, mean grain size has an important bearing on the degree of absorption and/or reflection of sound at or near the sea floor. Figure 2 serves two important purposes: 1) It provides a quick picture of the average size of surficial sediments in the North Pacific; and 2) it illustrates the shortcomings of interpreting the acoustic properties of the sea floor which might come from analyses of short cores and surface grab samples.

The analyses reveal that the normal deep-sea sediments of the North Pacific are extremely fine-grained. Most are pelagic clays with mean grain sizes that range from 1 to 2 microns.

Only in areas within 100 miles of the continents does the average size increase slightly, reflecting contributions of terrigenous materials.

It appears that the bulk of coarse detritus transported seaward is being very effectively trapped in the circum-Pacific trenches and ponded behind the seamounts off Alaska and California. The result is that only the finest of particulate matter is reaching the

- 11

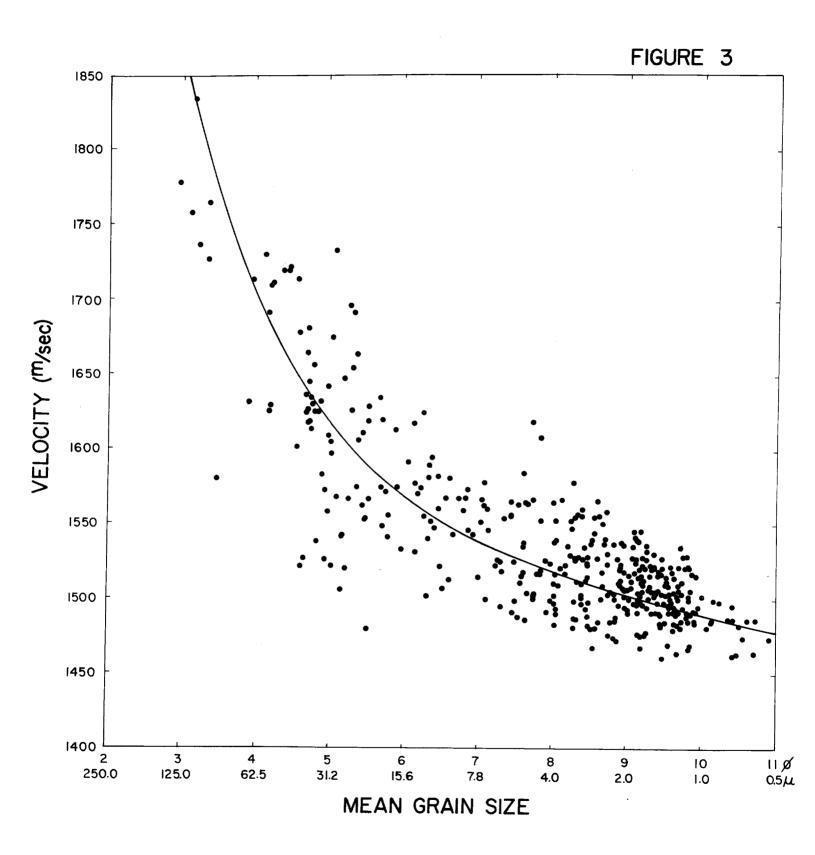

deep areas of the North Pacific. In northern latitudes (north of 40 degrees) there are a few cores with anomalously high mean grain sizes. The tops of these cores contain ice-rafted pebbles or sand. The erratic distribution of such material in the cores precludes the use of ice-rafted sediment in studies of the acoustic nature of the sea floor.

The surface sediments of the North Pacific are characterized by low sound velocities. Based on the data presented in figure 3, the area within the 1 micron contour in figure 2 has a velocity of 1500 m/sec, that between the 1 and 2 micron contours 1510 to 1515 m/sec, and those sediments with average sizes of the order of 3 microns should have velocities of approximately 1520 m/sec.

Therefore, the majority of surficial sediments in the North Pacific are characterized by sediment velocities lower than that of the overlying sea water.

If only the tops of the cores are considered, it would seem that the majority of the sea floor should have low velocity characteristics, high absorption values, and the reflectivity of the bottom would be minimal. However, these are erroneous conclusions as the tops of the cores are only representative of the entire sediment section in a restricted portion of the North Pacific. In those cores that are uniform throughout, sediment at

the top of the core is representative of the entire sediment section. In figure 2, the areas of the Pacific where this situation exists are shown by shading. These areas are characterized by deep-sea clay sedimentation; the deposits have low velocities, and the sea floor should show high absorption values and low reflectivity. Beyond the limits of these regions, the tops of the cores are not an index of the acoustic nature of the sea floor.

DISTRIBUTION OF SUB-BOTTOM REFLECTORS AND THE ACOUSTIC PROVINCES OF THE NORTH PACIFIC

The occurrence of sub-bottom reflectors in the North Pacific is principally a function of proximity to land. Reflectors most frequently encountered are of two types: 1) ash horizons and 2) turbidites. Both require that land be in the vicinity to serve as a source of large amounts of sedimentary material. Therefore, the major sub-bottom reflectors of the North Pacific are located along the edges of the continental masses (fig. 4). Thin ash layers are common in the cores collected off the east coast of Japan, the Kurils, the Kamchatka Peninsula, and the Aleutians. In the eastern Pacific (off the coasts of Alaska, British Columbia, and California), turbidite sequences are the rule. Ash is dis-

off the west coast of the American continent. As would be expected, there is an area of overlap of the two types of reflectors. Both are found in cores taken in the region of the Aleutians.

JAPAN ACOUSTIC PROVINCE

Cores taken from the waters east of Japan, the Kurils, and the southern half of the Kamchatka Peninsula consist of deep-sea mud and clay interlayered with thin horizons of white ash. They occur within a zone of irregular width which ranges from 100 miles to 600 miles from shore (figs. 4 and 5). The ash layers that are greater than 5 cm thick are shown in figure 5. Although the ash horizons are relatively thin, they are coarser than the sediments with which they are associated and occur as distinct layers with sharp boundaries. They are characterized by higher velocities and higher wet densities than the sediments with which they are intercalated. Therefore, they provide a series of velocity contrasts close to the sediment-water interface. Reflectivity in the Japan Acoustic Province should be higher than that of the Central North Pacific Acoustic Province, but lower than that of the Aleutian-Alaska Acoustic Province.

No cores have been recovered from the waters within 100 to

200 miles of the Asian shoreline. Presumably, if cores were available, they would contain a far greater number of ash layers and the ashes would be slightly coarser in texture. As a consequence, bottom reflectivity should increase as land is approached.

CENTRAL NORTH PACIFIC ACOUSTIC PROVINCE

Sub-bottom reflectors are rare in the north central Pacific (figs. 4 and 6). The majority of cores from this area are uniform throughout and consist of monotonous sequences of deep-sea clay. Such sediments are characterized by very low compressional velocity, low wet density, and are extremely fine-grained. Reflection should be minimal within this province, whereas absorption values should be correspondingly high.

There are two areas of the sea floor within the province where sub-bottom reflectors exist but are limited in aerial extent.

Within 100 miles of the shores of the Midway and Hawaiian Islands good sub-bottom reflectors occur. They consist of sand and gravel layers. The sands are generally carbonate detritus which has moved downslope from shallow waters through turbidity current activity. The layers of gravel are made up of basalt pebbles. Presumably these coarse volcanic ejecta represent periods of explosive volcanism on the Hawaiin Islands.

Cores taken in the vicinity of the Emperor Seamount Chain contain layers of volcanic silt. They are brown in color, generally thicker, and coarser-grained than the ashes within the Japan Acoustic Province. They offer good sub-bottom reflectors and will be described in detail in future reports.

ALEUTIAN - ALASKA ACOUSTIC PROVINCE

The Aleutian-Alaska Acoustic Province is shown in figure 7.

It is the most complex area of the North Pacific. In subsequent reports it will be necessary to sub-divide this region into three separate acoustic areas: 1) Aleutian Province, 2) Alaska Province, and 3) British Columbia Province.

Only a brief description of the Aleutian-Alaska Province is given at this time. Sub-bottom reflectors include turbidites, brown ash layers, current winnowed sands, and possibly diatom ooze. In figure 7, all turbidites and ash layers which are greater than 10 cm in thickness are shown as solid black sections within the cores. The writers consider the Aleutian-Alaska Province to be characterized by high bottom reflectivity within the area designated. The turbidite and ash layers are thick and considerably coarser than any sediments elsewhere in the Pacific. These high velocity layers provide excellent sub-bottom reflection of sound.

The most recent cruise of the R/V Robert D. Conrad included a series of traverses and coring stations within the Aleutian-Alaska Acoustic Province. The cores collected during this cruise will add greatly to the information on sub-bottom reflectors south of the Aleutian Islands and within the Gulf of Alaska.

CONCLUSIONS

The North Pacific contains distinct acoustic provinces which can be effectively delineated and described by studies of deep-sea cores. The central North Pacific has been an area of clay deposition for several million years. Sub-bottom reflectors within this province are rare and occur only in areas within 100 miles of the Midway and Hawaiian Islands. They are turbidites and coarse volcanic detritus derived from the Islands.

East of Japan, the Kuril Islands, and the Kamchatka

Peninsula, airborne ash has been blown seaward during periods of volcanism and now forms distinct, thin, white layers of silt-sized ash. The cores reveal that the frequency of ash layers increases toward the Asian coastline. Bottom reflectivity in this region should be higher than in the more central areas of the North Pacific and presumably will increase in a landward direction.

North and south of the Aleutian Islands, at the southern limit of the Gulf of Alaska, and off British Columbia, reflectivity should be greater than other areas of the North Pacific. Here thick turbidite sequences and coarse-grained brown ash layers are common. Sound reflection at the sea floor should be maximum within this province.

Acknowledgment

We gratefully acknowledge the U. S. Naval Ship Systems

Command for providing financial support for the investigation

(Contract N00024-67-C-1186). Laboratory and technical assistance was given by S. Jones, S. Walker, B. Bush, D. Liebesberger,

D. Ultsch, L. Murphy, M. Parsons, V. Jones, and D. Hogge.

Drafting and typing of the manuscript were done by M. Seely and

B. Brown, respectively. Thanks are also due members of the

Core Laboratory at Lamont for their cooperation.

APPENDIX

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES GRAIN SIZE DATA

7/

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

GRAIN SIZE DATA

VEMA 20

TRANS. KURT. Ke င္သ 48 52 45 49 4 51 49 45 55 4 44 47 45 46 45 47 SKEW +.07 -.02 +.09 +,14 + 09 +,15 +.15 +.14 .01 +,17 +,11 STAND. DEV. 2,43 2.73 2,46 2,40 2,36 2,73 2,18 2.14 2.66 2,30 2,20 2,45 2,15 2.17 2,41 2,31 2.61 3,18 1.41 1,12 1.67 0.89 0.35 0.00 0.83 1,37 1.49 0.83 0.92 2,98 1.21 1.81 MEAN-MZ 0.98 0.94 9.22 8,29 10.22 9,51 9.46 10,05 69.6 9.11 9.80 10.09 10,13 6.6 8.39 10,20 9.39 10.22 10.11 %-SILT SILT + CLAY 29 39 25 33 49 28 25 19 18 16 15 .32 19 .15 91. 4 17 CLAY 1 83,48 72,03 60.76 75.17 73.00 66.77 70,57 50,53 81,25 83,91 82.82 55,93 81.20 84.94 80.51 82,83 67.99 SILT 33,06 24.82 29,33 31,35 18,76 19,49 17.16 16,38 14.64 27.85 38.87 24.68 46.34 43,35 17,75 15,05 15,63 37 2,32 10 GRAVEI SAND 1.00 .14 1.45 .12 17 13 1,55 .01 0. 0, 99• 8 0.95 0.27 CORE (Cm) 15 36 0 0 0 0 0 0 0 0 0 0 0 0 0 0 O, DEPTH IN METERS 4790 4773 3749 2628 2659 2983 5338 5042 5788 5302 1657 3711 3801 4205 5363 5351 5207 CORE NO 8 53 8 69 5 2 2 8 8 디 2 **67**

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES GRAIN SIZE DATA

VEMA 20

	DEPTH IN	DEPTH IN	% % G	% N	%17	۶۶ کا کا کا	%-SILT	MEAN-MZ	-Mz	STAND. DEV.	SKEW	TRANS. KURT. Ka'
CORE NO.	METERS	CONE	•	1	36.70	62.15		9.33	1.55	2.61	+.13	.43
5 8	4004	c		0 50	30 R7	19.99		9.59	1.30	2,58	+.14	.45
20	A345	c		32	23.28	1		9.95	1.01	2,46	+,05	.46
8 8	4457	0		.17	27.30		•	9.76	1.15	2,34	+,15	.43
	3817	0	1	.71	22,01	l	.22	68.6	1.05	2,40	+.07	.47
3 / 3		C	,	.07	15.91	84.02	•	10.26	0.31	2.23	+*08	.45
22	4819) 0	1	80	20,83	79.09	•	10,00	0.98	2.21	+,14	.45
8	5081	o	,	8	24.01		•	9.70	1.20	2.54	+ 06	51
8	5706	C		.12	17.32	L		10.16	0.87	2.17	+,16	.43
6 6	5991	0	1	05	19.57	80,38	•	10.01	0.97	2,32	+,10	.48
5	5863	C	ı	01	20.44	79,55	.20	9.97	0.99	2,25	+,15	.46
6	5764	c	1	.27	19,63	<u> </u>	.20	66.6	0,98	2,27	+,14	•46
63	5797	0	•	69	21.95		, 22	9.92	1.03	2,33	+,10	• 46
28	5993	0	1	60	24.12	75.79	.24	9.86	1.08	2,33	+.12	45
95	5804	0		.05	16.61		,17	10.27	0.81	2,33	+•03	• 46
%	5771	0	•	.01	31.66	68,33	.32	9,16	1.75	2,68	+.07	25

MGG 0 1 9 9 5 0 0 1

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

VEMA 20						GRAIN	GRAIN SIZE DATA					
CORE NO.	DEPTH IN METERS	DEPTH IN CORE (Cm)	GRAVEL SAND	SAND	SILT	% CLAY	SILT + CLAY	MEAN-MZ	MZ T	STAND, DEV	SKEW	TRANS.
97	5841	0	ı	2.	17.87			10.0	0.95	2.38	+ 07	51
98	5673	0	1	.03	20,45	79.52	. 20	9.98	0.99	2.32	+.10	-47
66	5486	0	1	• 02	19.91	80,07	.20	9.97	36°0	2.30	+.14	47
100	5340	0	1	•01	22,00	77,99	.22	98.6	1.07	2.37	+ 10	46
101	4460	0	1	•16	42,95	56.89	.43	8.59	2.58	3.05	+	43
102	5216	10	ı	.02	26.65	73,33	.27	9,63	1.26	2,70	+.19	.48
103	3442	0	1	1.37	41,13	57,50	.42	8.71	2.37	2.86	+,11	48
104	5449	O	1	0.00	77.46	22,54	.77	7.00	7.79	1,75	+.37	.58
105	5336	0	i	98.	37,39	61,25	38	9.55	1,33	2,17	+.27	44
106-		NO CORE										
107	5872	0	1	91.	28.20	71,65	.28	8.99	1.%	3.00	07	8.
108	5625	0	16.99	•16	23,31	59,54	.28	7.23	6.63	5.36	43	.61
109	5629	0	1	1.26	34.52	64.22	.35	8,99	1.96	2.52	+.10	72
110	4334	0	5,83	12,14	34,14	47.79	.42	7.61	5.10	4.41	21	.55
111	3851	0		.83	53.98	45,19	.54	7.98	3,96	2,45	+.24	49
112	3592	0	-	1.49	54,83	43,68	• 56	7.78	4.53	2,30	+,13	.55
113	3801	0	1	60.	44.57	55,34	45	8.56	2.64	2,46	+. 22.	53

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

						GRAIN	GRAIN SIZE DATA					
CORE NO.	DEPTH IN	DEPTH IN CORE (Cm)	% GRAVEL	% SAND	SILT	CLAY	% %-SILT CLAY SILT + CLAY	WEA	MEAN-MZ	STAND, DEV.	SKT	TRANS. KURT, K.
114	3810	0	t	. 25	39.84	59.91	40	9.01	1.94	2,40	+ 30	53
115	3813	0		.10	35.61	64.29	• 36	9.22	1,67	2,45	+.21	.49
116	3895	0	2	1.23	41.52	57.25	•42	8.77	2,28	2,45	+.24	.51
117	3904	0		1,35	47,28	51.37	• 48	8.31	3,15	2,65	+.12	73.
118	5360	0	1	1.27	38,25	60.48	.39	8.88	2,11	2,71	+.10	.53
119	2739	0	ı	2, 54,	67.37	30.09	69•	6.83	8.74	2,43	+.46	•43
120	6216	0	1	0.93	38,37	60.70	39	8,85	2,15	2,64	+.16	.49
121	5859	0	ŧ	1.08	42.59	57,33	43	8,62	2,52	2,63	+.15	.49
122	5563	0	1	-24	40.58	59,18	.41	8.83	2.19	2,58	+.12	• 56
123	4903	0	t	.74	44.57	54.69	.45	8.61	2,55	2,52	+,15	.52
124	5534	0		2,38	45.43	52,19	.47	8.49	2.77	2,79	+,17	49
125	5545	0	1	.14	43,75	56.11	• 44	8.64	2,50	2,35	+,19	.54
126	5515	0	1	.57	37,30	62,13	38	8.94	2,03	2.46	+.17	.51
127	5583	0	1	•36	38.28	61,36	38	9.08	1.84	2,61	+.12	•52
128	5612	0		.16	28.96	70,38	•29	9.44	1.43	2,47	+.20	.45
129	5766	0		.24	38.46	61,30	• 39	9,17	1.73	2,46	+.19	•48
188	NO CORE											

MGG 0 1 9 9 5 0 0 1

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

		٢		T	1	1					1		
	TRANS.	KURI.Kg	• 48		.52		.46	.51	• 48	.50	.48	09.	.47
	SKEW	Skı	00.		+.31		+,32	80 ° +	+.19	+.16	+,18	8	+,13
	MEAN-MZ STAND.DEV. SKEW	OI	3,13		2,98		2,86	3,06	2,77	2,70	2,72	3,97	2,73
	AN-MZ	۲	2,52		40.5		3,65	3,68		1,99	3,05	6.47	8,97 1,99
	빛	Ø	8,62		4,62 40,5		8,09	80.8	8.40	8.97	8,35	7.27	8,97
GRAIN SIZE DATA	% %-SILT	SILT + CLAY	38		65		54			68°	.49	.55	39
GRAIN	%	CLAY	57.67		19.60		45,75			59,79	50,46	39.06	60.49
	39		35,45		36.15		53,63		48.69		47.48	47,46	38.12 60.49
			6.88		44.25		0,62	10,40	96.0	1.70		8.40	
	% %	GRAVEL	•				ı			1	1	5.08	1
		CORE (Cm)	0	NO CORE	0	NO CORE	0	0	0	0	0	0	0
	DEPTH IN	METERS	5858	229	1503	2352	2598	6306	3919	4244	3782	4477	4987
	VEMA 20	CORE NO.	131	132	133	134	135	136	137	138	139	140	141

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

•.								T	T		\exists				T	T			
TRANS.		•42	• 46	• 45	.45	.47	•48	.45	.47	.53	45	.48	.45	48	.47	•46	•47	•49	
SKEW	Two	+• TO	+,25	+113	+,17	+.22	+30	+,15	+.01	+.14	+,11	+.12	+,11	+,10	02	+,16	+,13	+,18	
STAND. DEV.	1-1	2.89	2.84	2,70	2,74	2,20	2.03	2,20	2,24	2,36	2,29	2,41	2,35	2.49	2,77	2,39	2,42	2,53	
MEAN-MZ		2,13	3,05	1.92	1,66	0.99	1.17	0.88	1.07	-84	.97	1,13	1.05	1.22	1.39	1.20	1.34	1,55	
MEA	d	8,87	8,35	9,02	9,23	96.6	9,73	10,15	9.87	10,21	10,00	9.78	68°6	6.67	9.49	9.70	9,54	9.33	
% % SILT	איזרין ג	•45	.52	.37	.49	.17	.21	.17	.19	.11	.19	•24	•20	.25	.31	.26	.27	•30	
~ > > > > > > > > > > > > > > > > > > >	1 1 1 3	54.22	47.34	62,37	51.42	83.07	79,39	83.43	80.86	88.72	80,95	76.28	79.64	74.44	69.07	74.28	72,30	69,17	
% L	2111	43.82	51.14	37,24	48.56	16.91	20,61	16.57	19,12	11,28	19,05	23,72	20,36	25.10	30.24	25.51	27,26	30,21	
×5	SAND	1.96	1.52	0,39	0.02	0.02	ı	1	0,02	1	1	1	0	0.03	0.31	0.21	0.44	0.62	•
% % CO	GRAVEL	1	1	•	ı	1	1	1	-	ı	•	1	1	0.43	0.38	3	l	1	
DEPTH IN		0	0	0	0	0	0	10	0	0	0	0	0	0	12	0	0	0	
Z		2992	3751	4583	4625	4674	4867	5365	1099	5879	5953	5982	5954	5954	5369	5872	6015	6119	
VEINT 21	CORE NO.	59	9	61	62	63	64	65	99	29	89	69	70	71	72	73	74	75	

j'

MGG 0 1 9 9 5 0 0 1

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

VEMA 21						NIT-VID	and alle unia					
CORE NO.	DEPTH IN METERS	DEPTH IN CORE (Cm)	% GRAVEL	SAND	SILT	CLAY	% %-SILT CLAY SILT + CLAY	MEA Ø	MEAN-MZ	STAND. DEV.	SKEW	TRANS. KURT. Kg'
76	5916	0	1	1,26	45,66	53.08	•46	8,55	2.66	2,84	+,16	.48
78	1106	0	99 0	88,07	7.47	3,80	99.	0,80	5.71	1.62	+ 49	.74
79	3550	0	1	7.54	63,28	29,18	.68	6.73	6.39	2,58	+,46	50
80	4400	0	0.03	23.56	49,51	26.90	. 65	6,30	12,66	2.99	+.27	49
81	4352	0	1	22,16	35,88	41,96	•46	7.74	4,65	2,84	+,14	.49
82	4565	0	1	0.83	42.67	56.50	.43	9.02	1.93	2,66	+,13	.47
83	3702	0	1	17.92	55.50	26.58	89*	6,33	12,43	2,61	+,27	.47
28	4116	0	ı	1,60	23.06	75.34	.23	9.72	1.18	2,38	+,14	.47
85	1684	17	1	73,16	15.41	11.43	.57	3,51	87.5	2,37	+,61	.63
98	5717	0	ı	2,28	26,36	71.36	.27	88*8	2,11	2,83	+,14	49
87	5879	0	1	2,87	36,55	89.09	38	8,85	2,16	2,64	60°+	50
88	5757	0	ŧ	0.14	58,15	41,71	.58	7.79	4.50	2.86	4.	48
89	5821	0	1	96.0	57.57	41.47	• 58	7,21	6.75	2,33	+ 50	49
06	5841	0	1	21,33	42,85	35,82	.55	6,67	9.82	3,26	\$.47
91	5128	0	ı	0.88	73,51	25,61	•74	7,24	85*9	2,38	+.47	48
92		NO CORE										
93	2878	0	1	42,11	52,13	5,76	06*	4.12	57.3	1.37	÷36	.71
8	1252	MANGANESE PAVEMENT.	PAVEME		NO SAMPLE							
				Į.				-				

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

	- 6																		
TRANG	KURT.K	• 55	• 55	•50	09•	.49	•50	.42	.42	•59	.39	.47		• 44	.43	•46		• 50	بر ح
SKFW	Skī	+,31	+.43	+.13	+.45	+,15	+.16	+,17	-,44	00.00	+.95	+.22		+.16	+,11	+,11		+.21	4
STAND, DEV. 1 SKEW	6	2,08	2,18	2,62	2,79	2,49	2,72	2,67	4.11	0.42	4.00	2,60		2,90	3,06	2,70		2,29	2 41
MEAN_M2	エ	14,85	9.50	2,18	61.0	1.46	2,29	2,76	590.	143,5	4610.	2,03		2,58	2,87	1,70		5,22	70
MEAN	æ	6.07	6.71	8.84	4.03	9.41	8,77	8.49	0.53 690	2,80 143,5	2 20 4610	8.8		8,59	8.44	9,20		7.58	6
TIIS %	SILT + CLAY	.81	. 75	.40	.71	.35	.42	.43	.81	.35	.73	•39		•46	•46	.45		• 58	ď
_	CLÃY	17.47	24.44	59,56	12,43	64.59	57,68	55,52	4.04	2,36	3,52	61.04		53,25	52,72	53,94		41,78	
%	SILT	72,43	74.55	39.19	30,73	34,86	40.93	42,36	17.02	1.28	99.6	38, 64		44.68	44.74	44,76		56.99	,
%	SAND	9.94	1.01	1.25	56,84	0.55	1.39	2,12	39.05	96,25	13,95	0,32		2.07	2,54	1,30		1.23	
%	GRÄVEL	0,16	•	,	1	8			39,89	0,11	67.87	1		ı	ŧ	ı		1	
	CORE (Cm)	0	0	0	0	0	0	0	0	0	0	0	NO CORE	0	0	0	NO CORE	0	(
DEPTH IN		4698	5475	4868	2134	5148	5233	5293	139	132	143	1902		2217	1900	1964		5616	0
VEMA 21	CORE NO.	95	96	76	86	66	100	101	102	103	104	105	106	107	108	109	110	111	CLL

MG301995001

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

DATA
SIZE
GRAIN

	r															-		
	TRANS. KURT.K.	•55	•46	.48	.47	.48	.47	•45	44	.47	50	•46		•43	.54	.54	.49	.48
		+.15	+,11	+,18	+.23	+.10	+,15	+.37	+.29	+,12	+ 03	+.11		+,18	+,16	+,03	+,16	+ 00
	STAND.DEV. SKEW	2,60	2,71	2.86	3.00	2,62	2,85	2,85	2,57	2,70	3.29	2,69		2,51	2,42	2,67	2,43	2,76
	й Х	2,16	1.70	4.65	3,99	1,56	2,17	3,46	3,17	1.78	3,55	1,58		1,26	1,68	1.97	1,42	1,80
	MEAN-MZ	8,85	9,20	7,74	7.96	9,32	8.84	8.17	8,30	9,13	8,13	9.31		9,62	9,21	8,98	9,45	9,12
GRAIN SIZE DATA	SILT + CLAY	.39	.35	54	.55	.32	.44	.59	.51	35	.45	.35		. 23	.30	.34	.32	35
GRAIN	% CLAY	98*69	63,76	44.85	43.79	66.91	54.97	40.66	48.64	64.68	53,85	64.93		76,58	69.49	65,12	69,82	63,96
	% SILT	38, 55	35,05	53.01	54.42	32,19	43,82	58,55	50,76	34.62	44.18	34.44		23,37	30,27	33,93	32,10	33,79
	% SAND	1.59	0.47	2.14	1.79	0.00	1.21	0.79	09.0	0.70	1.97	0,63	SAMPLE	0,05	90.0	0.95	90.0	2,25
	% GRAVEL	ı	0,72	1	1	1	1	1	1	1	B		皇	1	0.18	1	1	8
	DEPTH IN CORE (Cm)	0	0	0	0	0	0	0	0	0	0	0	INDURATED	0	0	0	0	0
	DEPTH IN METERS		5618	529 8	5929	5042	4971	4418	6009	5949	5821	4241	3592	4931	8809	3968	5256	5477
(V)	CORE NO.	113	114	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

	_												_			- 		<u> </u>
	TRANS. KURT.K.	.49	•45	.45	99•	•48	.45	.48	.51	.43	.53	.42	.54	.55	•48	•46	.46	.51
	SKEW	+.28	+.13	+,13	99*+	90°+	+.10	+.05	+ 18	+.21	+.11	+.06	+.20	+.19	+ 33	+,21	+.14	02
	STAND, DEV. SKEW	2.57	2,75	3,05	2,27	2,77	2,57	2,78	2,72	3,44	2.41	2,61	2,65	2.91	2,68	2,76	2,91	2,57
	T Z	6,18	1.77	3.24	36.9	1.75	1.51	1.96	4,00	5,25	4.56	1,37	2,53	2,55	7,88	2,32	2.72	4.09
	MEAN-MZ	7,33	9,14	8.26	4.75	9,15	9,37	8,99	7,96	7,57	7.77	9.51	3.62	8.61	6.98	8.74	8.52	7.93
GRAIN SIZE DAIA	%-SILT SILT + CLAY	09*	.70	•49	.73	34	.34	.35	.55	53	,54	.29	.46	.46	69•	.44	.47	.47
GKAIN S	CLAY	38.70	63,35	50,36	13,57	63,86	65,52	64.40	46.70	40.63	45.04	70.95	53,01	51,62	31,21	55.44	52,27	51,65
	% SILT	58,49	34.77	47.58	36.07	33,12	34,11	34.71	53,23	46.06	52.61	29,05	45,31	43.73	68,55	44.03	47.00	45,91
	SAND	2,81	1,33	2,06	50,36	3.02	0,37	0,89	0.07	13,31	2,35	ı	1.68	4,65	0,24	0.53	0.73	2.44
	% GRAVEL	8	•	1	1		,	8	•	•	;		1	•	1		1	1
	DEPTH IN CORE (Cm)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	DEPTH IN METERS	5665	5416	5055	3279	3532	3338	2999	3418	1135	3731	3760	3779	3237	2317	3270	1919	2576
VENO 01	CORE NO.	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165

May 0 1 9 9 5 0 0 1

31

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

						GRAIN	GRAIN SIZE DATA					
VEMA 21 CORE NO.	DEPTH IN METERS	DEPTH IN CORE (Cm)	% GRAVEL	% SAND	SILT	% CLAY	%-SILT SILT + CLAY	ME	MEAN-MZ	STAND.DEV. SKEW	SKEW	TRANS. KURT.K.
166	7103	0	ı	0.24	37,87	61.89	38	3,67	2.44	2.85	+.17	44.
167	6069	0	3	27,03	63,79	9.13	.87	4.31	35.6	1.73	+ 70	.73
168	165	0	0,33	47,47	44,43	7.77	. 35	4.10	58,3	1,72	+.22	•61
169	1858	0	1	3,95	53,23	37,82	•39	7.69	4.84	2,90	+ 36	51
170	7011	0	1	1.54	42,45	56.01	.43	ි. 93	2,05	2,79	+ 13	.48
171	5013	0	1	α, 71	72,78	26.51	.73	66.9	7.84	2,12	+.47	.57
172	5198	0	1	12.24	66.40	21,36	• 26	6.20	6.20 13.6	2,18	+.28	.49
173	5493	Ó	1	1.40	25.51	73.09	• 26	3.64	2.50	2,51	+.14	• 46
174	5691	0	ī	60.0	20.23	79.68	.20	10.03	0.95	2,35	+ 09	.45
175	5654	10	8 .	.01	21.96	78.03	.22	9.79	1.13	2,28	+.14	•48
176	5621	0	. 1	0.03	18,03	81,94	.19	10.03	96.	2,34	+•11	•48
177	6022	5	1	1	16.43	83,57	.16	10,00	76.	2,11	+.27	.45
178	5720	0	1	0.27	24.85	74.88	• 25	9.64	1.25	2,41	+.17	• 46
179	5771	0	ı	0.03	16,59	83,38	.17	10,16	0.87	2,35	* 008	•43
180	5676	0	1	0.01	15,52	84.47	.16	10,36	0.76	2.18	+12	44
181	5302	0	3,97	90.0	15.00	80.97	.16	10.07	.93	2,37	% +	.47
182	5824	4	1	0.03	15,59	84,38	•16	10,05	-94	2,14	+.20	.45

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

GRAIN SIZE DATA

VEMA 21	I INI HIGIG	NE DITH IN	 	36	 %	%	%-SILT	ME	MEAN-MZ	STAND. DEV. SKEW TRANS.	SKEW	TRANS.
CORF NO.	METERS	CORE (Cm)	GRAVEL SAN	SAND	SILT	CLAY	CLAY SILT + CLAY	Ø	H	1 1	Skī	KURT. Kg
1.00	1	c	1	0.01	14.40 85.59	85.59	14	10.20 0.85	0.85	2,10	+.22 .43	•43
TOS	7710											
Š	7007	c	1	0.05	22.17 77.78	77.78	.22	9.33	9.38 1.06	2,34	+.13 .46	•46
Š	4004			1								
	100	c	1	1 46	74 10 24.44	24.44	.75	6.75	6.75 9.24	2,14	+.50 .55	.55
183	4827			2	2							
	0240	c	1	1,58	50.84 47.58	47.58	.52	8.46	8,46 2,83 2,91		+.27 .45	•45
201	2010	>		200								

 $q_j^{j_j}$

MGG 0 1 9 9 5 0 0 1

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

	STAND.DEV. SKEW TRANS.	1.17 2.39 +.10 .49	1.29 2.38 +.21 .48	1.09 2.29 +.15 .45	1,22 2,38 +,19 ,45	1,37 2,57 +,10 ,47	2,23 2,83 +,11 ,49	2.38 2.78 +.07 .52	4,16 3,01 +,14 ,44	2.73 2.92 +.09 .50		2,99 3,00 +,12 ,45	2.97 2.49 +.19 .53	4.27 2.81 +.06 .50	2,29 2,74 +,19 ,47	1.71 2.79 +.03 .47	1.69 2.71 +.10 .45	1.86 2.82 +.13 .47	1 94 2 77 + 15 48
	MEAN-MZ	9.74	9.60	9.84	89.6	9,51	8.80	8,71	7.90	8,51		8.38	8.39	7.86	8.77	9.19	9.20	9.07	0,01
GRAIN SIZE DATA	% %-SILT CLAY SILT + CLAY	.39	• 25	.21	• 26	• 29	• 36	40	.53	.45		.47	.47	•50	•46	.34	.34	.33	27
GRAIN	CLAY	61,39	74.65	79-17	73.84	70.59	36,19	58.98	46.67	54.11		52,38	51.77	48.50	53,33	65.70	65,25	64.68	61 67
	SILT	38,57	25.27	20, 77	26.04	28.98	36,23	39,36	51, 63	44.31	SAMPLE	46.62	46.66	48.81	45.24	33,54	33,64	32,41	35 96
July.	% SAND	0.04	0.08	0.05	0.12	0.43	0,58	1,66	1, 70	1,58	SN SN	1,00	1,57	2.69	1,43	0.76	1.11	2.91	0 77
	% GRAVEL	,	8	8	1	1	1	1	1	ŧ	PAVEMENT		ı	1	ŧ	8	1	ŧ	
	DEPTH IN CORE (Cm)	0	0	0	0	0	0	0	0	0	MANGANESE	0	0	0	0	0	0	0	C
	DEPTH IN METERS	5402	5682	5892	5894	4621	3587	3913	3550	3766	3638	3729	6092	5751	5740	5621	5544	4387	4056
BC_10	CORE NO.	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

	٠.					1	1		1	1	T	1	T	1	T	Π		1
	TRANS KURT K	49	40	.52	.46	4	-43	49	.47		9	51	-47	47	5.	.52	50	<u> </u>
	SKEW	+ 05	4	+ 01	+.17	+,12	+.14	+.01	+ 08	+	1	+12	60*+	4	+, 05	+.23	+33	+ 20
	STAND. DEV. SKEW	2.85	2,76	2,82	2.42	2,15	2,57	2,73	2.69	2 82	70.0	2,63	2.83	2,92	3.22	2,78	2.59	2.45
	MEAN-MZ	1.90	1.65	2,00	1.22	0.67	1.47	1.48	1.50	1 98		1.74	2,15	2,43	16,63	3,20	3.18	2.53
	MEAI	6,03	9,23	8,96	89*6	10,54	9.41	9.40	9,38	8,98	3	9.16	8.85	8,68	5.91	8,28	8.29	8.62
GRAIN SIZE DATA	% %-SILT CLAY SILT + CLAY	• 36	98•	.37	.27		.31	.31	.32	38		.34	•38	.41	.70	.51	.52	.47
GRAIN	CLAY	63.12	63.50	61.94	72,84	74.13	68.81	66.99	66.93	61.34		64.71	60,49	58.00	23,30	47.77	46.99	52,34
	SILT	34.90	35.03	36.70	27,16	25,87	31,03	29,57	31,11	37,97	,	33,99	36,50	40.41	54.08	50,55	51,52	1
	SAND	1,98	1.47	1,36	8		0.11	0.25	1.97	69.0		1,30	3,01	1.59	22,62	1,63	1.49	
	% GRAVEL	1	ı		1		8	3.19	1	1		ı	ı	8	1	,	1	3
	DEPTH IN CORE (Cm)	0	0	0	0	0	0	0	0	0	NO CORE	0	0	0	0	0	0	0
	DEPTH IN METERS	3191	4014	4226	5302	5808	4312	5698	5561	4986		6591	6216	3673	3422	3733	3025	3684
RC-10	CORE NO.	174	175	176	177	178	179	181	182	184	185	186	187	188	189	190	191	192

a/2

MGG 0 1 9 9 5 0 0 1

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

			*															
	KURT.K.	25	.43	,45	09*	.57	•55	.51	.45	.61	48	.45	45	.64	.47	• 50	.42	.51
	SKEW	12	+,25	+.20	+,26	01	+,23	+,14	+.11	12	+,12	+.12	+.12	19	+.02	÷.	+.13	+.25
	STAND, DEV.	6.79	2,43	2,48	2,98	0,57	2,72	2,79	2,64	3,66	2,50	2.21	2,54	3,91	2,82	2,81	3,03	2,60
	MEAN-MZ	215.6	1,31	1.30	12,09	175.9	4,01	3,92	1.35	2,32	1,49	1,05	1,41	1.50	1.84	2,40	2,00	3,83
	Ø.	2.21	9,58	9.58	6,36	2,50	7,96	7,99	9.53	8,74	9,39	9,89	9,47	9,37	60°6	8,70	7.64	8,02
GRAIN SIZE DATA	%-SILT SILT + CLAY	.70	,32	32	.65	.57	•56	.51	8,	35	30	.23	.31	.27	.35	.41	,53	.55
	CLAY	1,15	68,35	68,23	29,03	1,85	42,33	47.52	65.96	59,35	69.22	77.01	68.19	68,22	63,96	58.41	46,08	44.74
	SILT	2.72	31,65	31,61	53,09	2,42	54.34	50,11	33,95	31.92.	29.76	22,92	30, 93	24,97	34.07	40,45	52,47	54.08
	SAND	95,89	0	0,16	17.88	95,33	3,33	2,37	•00	3,84	1,02	.07	88	0,63	1.97	1,14	1.45	
	% GRAVEL	0.24	,	•	1	0.40			1	4.89	1	1	1	6,18	ı	8		1
	DEPTH IN CORE (Cm)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	DEPTH IN METERS	137	3801	3835	1007	397	3728	4698	7317	5158	5523	5883	5618	6081	5497	7264	3737	2774
RC-10	CORE NO.	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209

2,5

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

	_	- +					+					-+		+				-1
	TRANS. KURT. K	48	.49	.47	•45	43	•59	•50	. 55	• 60	•50	• 46	,45	.42	44	•37	.45	46
	SKEW	+,10	+.03	+,15	+.24	8	31	+.44	60	-03	+.19	+.07	+.03	+,18	+.03	+.40	+.10	+ 01
	STAND, DEV.	2,85	2.81	2,56	2,97	3.97	90.9	2,38	3.60	1,62	2.76	2,62	2.74	2.78	2,62	2,92	2,48	2,61
	MEAN-MZ	2,17	3,98	1.73	3.72	4.30	34.1	11.97	2,95	264.0	2.46	1,33	1.57	1.88	1.31	3249.	1,16	1,22
	3 8	8.84	7.96	9,13	8.07	7.86	4.87	6.38	8.40	1.92	99.8	9,55	9,31	9.05	9,57	-1.70	9,75	9,68
GRAIN SIZE DAIA	SILT + CLAY	.39	.47	920	.55	38	.57	.73	.40	.51	• 46	30	.33	38	.33	• 58	,24	.48
Ζ.	CLAY	59,75	51,62	64,36	44.96	50.01	35,56	26.74	55,33	2,81	52,67	69.27	66.70	61.56	67.47	1.73	75,67	70.71
	SILT	38,57	46.33	35,43	54.23	30.62	47.14	71.01	36.59	5,89	44.99	29,70	33,20	38,37	32,53	2,36	24.13	29,18
	SAND	1.68	2.00	.21	0.81	19.37	0,30	2,25	5,33	86,63	2.34	1,03	0.10	0.07	0	32,82	0,20	0,11
	% % GRAVEL SAND	1		1	ŧ	1	17.00	,	2,75	4.67	1	-			8	63.09	,	
	DEPTH IN CORE (Cm)	0	0	0	0	0	0	0	0	0	O	C	0	0	. 0	0	0	0
	DEPTH IN METERS	7284	5137	7231	71%	4731	4887	4989	4338	606	3786	3157	2834	3559	3645	1159	2536	2534
RC-10	CORE NO.	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226


MGG 0 1 9 9 5 0 0 1

SURFACE SEDIMENT SAMPLES FROM NORTH PACIFIC CORES

												·	
	TRANS.	*	9	440	46	9	•43	•46		•46	•45	46	AK
	SKEW	+ 10	4 13	23	+ 10		1. 14	8		+.15	+.14	+.21	1 1 2
	STAND DEV SKEW TRANS.	2.14	2 47	2.00	2.70	0 0	2,33	2.17		2,23	2,26	2,17	2.0%
	MEAN-MZ	0 80	1 20	0.76	1.66	5	1,022	0,73		3	0.94	0.85	00
	W.	10.13	9.70	10.36	9.23	0 57	75.5	10.41		70.07	10,06	10.20	90.6
GRAIN SIZE DATA	SILT + CLAY	.16	.23	.21	.37	33	3 5	51.0		97.	•18	.12	.21
GRAIN	CLAY	84,35		78.80	62,52	66.81	96 40	275.00	01 75	C/ • TO	82,33	87.51	78.72
	SILT	15,57	22,51	20.67	37.29 62.52	33,19	13 33	20.00			17,67	12.49	21.27 78.72
	% SAND	0.08	0.12	0.53	•19		گر		1.7		•	1	0.
	% % % GRAVEL SAND	1	2	ı	ſ	1					,	•	1
	CORE (Cm)	0	0	0	0	0	0	Jaco CN			3	0	0
	DEPTH IN METERS	2774	2765	2582	3200	4726	4674		4281	4707	4/3/	4491	4468
RC-10	CORE NO	227	228	229	230	231	232	233	234	735	200	236	237

REFERENCES

- Folk, R.L., 1965, Petrology of sedimentary rocks: Austin, Texas, Hemphill's, 154 p.
- Hamilton, E. L., 1956, Low sound velocities in high-porosity sediments: Jour. Acoust. Soc. America, v. 28, p. 16-19.
- Hamilton, E. L., Shumway, G., Menard, H. W., and Shipek, C. J., 1956, Acoustic and other physical properties of shallow water sediments off San Diego: Jour. Acoust. Soc. America, v. 28, p. 1-15.
- Hansbo, Sven, 1957, A new approach to the determination of the shear strength of clay by the fall-cone test: Royal Swedish Geotech. Inst. Proc. no. 14, 46 p.
- Horn, D.R., 1967, Correlation between acoustical and physical properties of deep-sea cores, Norwegian Basin: Tech. Rept. no. 1, Texas Instruments Inc., PO #58029-55154, Palisades, N.Y., Lamont Geol. Observatory of Columbia University, 88 p.
- Horn, D.R., Delach, M.N., and Horn, B.M., 1967a, Correlation between acoustical and other physical properties of deep-sea cores, northeast Atlantic: Tech. Rept. no. 3, Texas Instruments Inc., PO #58029-55154, Palisades, N.Y., Lamont Geol. Observatory of Columbia University, 115 p.
- Horn, D.R., Horn, B.M., and Delach, M.N., 1967b, Correlation between acoustical and other physical properties of Mediterranean deep-sea cores: Tech. Rept. no. 2, Texas Instruments Inc., PO #58029-55154, Palisades, N.Y., Lamont Geol. Observatory of Columbia University, 152 p.
- 1968, Correlation between acoustical and other physical properties of deep-sea cores: Jour. Geophys. Research, v. 73 (in press).
- Nafe, J. E., and Drake, C. L., 1957, Variation with depth in shallow and deep water marine sediments of porosity, density and the velocities of compressional and shear waves: Geophysics, v. 22, p. 523-552.

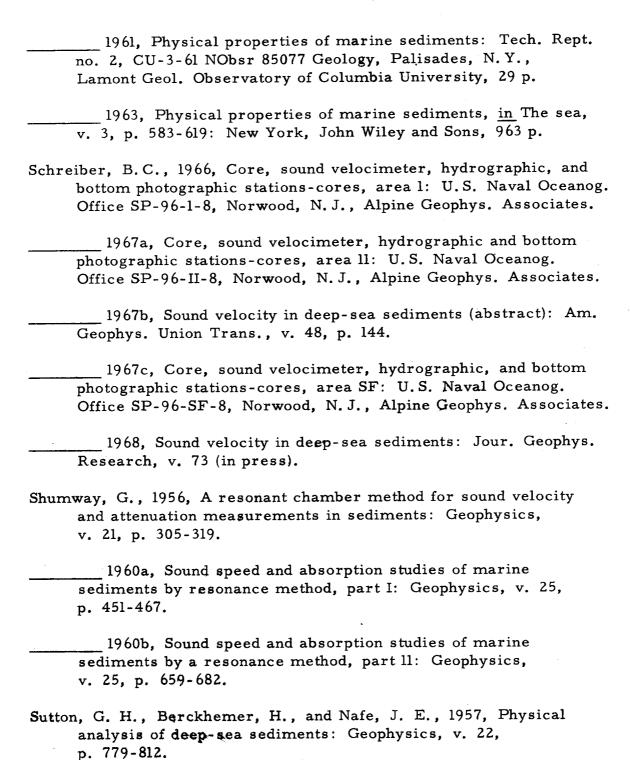

MGG 0 1 9 9 5 0 0 1

Distribution List

LAMONT GEOLOGICAL OBSERVATORY Columbia University Palisades, New York

DEPARTMENT OF DEFENSE

Director of Defense Research and Engineering Office of the Secretary of Defense Washington, D.C. 20301

1 Attn: Office, Assistant Director (Research)

NAVY

- Office of Naval Research Ocean Science & Technology Group Department of the Navy Washington, D.C. 20360
- 1 Attn: Undersea Programs (Code 466)
- 1 Attn: Field Projects (Code 418)
- 1 Attn: Surface & Amphibious Programs (Code 463)
- 1 Attn: Geography Branch (Code 414)
- 1 Commanding Officer
 Office of Naval Research
 Branch Office
 495 Summer Street
 Boston, Mass. 02210

- Commanding Officer
 Office of Naval Research
 Branch Office
 1030 East Green Street
 Pasadena, Calif. 91101
- Commanding Officer
 Office of Naval Research
 Branch Office
 South Dearborn Street
 Chicago, Illinois 60604
- 5 Commanding Officer
 Office of Naval Research
 Branch Office
 Navy #100, Fleet Post Office
 New York, N.Y. 09510
- 6 Director
 Naval Research Laboratory
 Washington, D.C. 20390
 Attn: Code 5500
- Commander
 U.S. Naval Oceanographic Office
 Washington, D.C. 20390
 Attn: Code 1640 (Library)

1 Attn: Code 031

1 Attn: Code 70

1 Attn: Code 90

MGG01995001

- West Coast Support Group U.S. Naval Oceanographic Office c/o U.S. Navy Electronics Laboratory San Diego, Calif. 92152
- U.S. Navy Electronics Laboratory Point Loma San Diego, Calif.
- 1 U. S. Naval Oceanographic Office Liaison Officer (Code 332) Anti-Submarine Warfare Force U.S. Atlantic Fleet Norfolk, Virginia 23511
- 1 U.S. Naval Oceanographic Office Liaison Officer Anti-Submarine Warfare Force Pacific Fleet Post Office San Francisco, Calif. 96610
- 1 Commander-in-Chief Submarine Force Pacific Fleet Fleet Post Office San Francisco, Calif. 96610
- 1 Chief
 Naval Ordnance Systems Command 1
 Department of the Navy
 Washington, D.C. 20360
- 1 Commander Submarine Development Group Two 1 Via: CDR Submarine Force U.S. Atlantic Fleet c/o Fleet Post Office New York, N.Y.

- 1 Chief Naval Air Systems Command Department of the Navy Washington, D.C. 20360 Attn: AIR 370E
- Office of the U.S. Naval
 Weather Service
 Washington Navy Yard
 Washington, D.C. 20390
- 1 Commander-in-Chief Pacific Fleet Fleet Post Office San Francisco, Calif. 96610
 - U.S. Navy Electronics
 Laboratory
 San Diego, Calif. 92152
- 1 Attn: Code 3102 1 Attn: Code 3060C
- Commanding Officer & Director
 U.S. Naval Civil Engineering
 Laboratory
 Hueneme, Calif. 93041
- Commanding Officer
 Pacific Missile Range
 Pt. Mugu, Hueneme, Calif.
- Commander, Naval Ordnance
 Laboratory
 White Oak
 Silver Spring, Maryland 20910

MGG 01 995001

- Commanding Officer
 Naval Ordnance Test Station
 China Lake, Calif. 93557
- 1 Commanding Officer
 Naval Radiological Defense
 Laboratory
 San Francisco, Calif. 94135
- 1 Commanding Officer U.S. Naval Underwater Ordnance Station Newport, Rhode Island 02884
- 1 Chief
 Naval Ship Systems Command
 Department of the Navy
 Washington, D.C. 20360
- 2 Attn: Code 00V1-K Code 2021
- 1 Commanding Officer
 U.S. Navy Air Development Center 1 Headquarters Air Weather
 Warminster, Penna. 18974 Service
- 1 Attn: NADC Library
- 1 U.S. Fleet Weather Central Joint Typhoon Warning Center COMNAVMARIANAS Box 12 San Francisco, Calif. 94101
- Chief, Bureau of Naval Weapons Code Ru 222
 Navy Department Washington, D.C.
- 1 Superintendent U.S. Naval Academy Annapolis, Maryland 21402
- Department of Meteorology & Oceanography
 U.S. Naval Postgraduate School Monterey, Calif. 93940

- 3 Commanding Officer
 U.S. Naval Underwater Sound
 Laboratory
 New London, Conn. 06321
- Office of Naval Research
 346 Broadway
 New York 13, New York
- Officer-in-Charge
 U.S. Fleet Numerical Weather
 Facility
 U.S. Naval Postgraduate School
 Monterey, Calif. 93940
- Commanding Officer
 U.S. Navy Mine Defense
 Laboratory
 Panama City, Florida 32402

AIR FORCE

- Headquarters Air Weather
 Service
 (AWSS/TIPD)
 U.S. Air Force
 Scott Air Force Base
 Illinois 62225
- 1 AFCRL L.F. Hanscom Field Bedford, Mass. 01730

ARMY

1 Coastal Engineering Research
Center
Corps of Engineers
Department of the Army
Washington, D.C. 20310

MGG 0 1 9 9 5 0 0 1

- Chief, Office of Marine Geology & Hydrology
 U.S. Geological Survey
 Menlo Park, Calif. 94025
- Director
 Pacific Marine Center
 Coast and Geodetic Survey U.S. ESSA
 1801 Fairview Ave., East
 Seattle, Washington 98102
- Geological Division
 Marine Geology Unit
 U.S. Geological Survey
 Washington, D.C. 20240
- National Science Foundation
 Office of Sea Grant Programs
 1800 G Street, N. W.
 Washington, D. C. 20550
- Laboratory Director
 Bureau of Commercial Fisheries
 Biological Laboratory
 450-B Jordan Hall
 Stanford, Calif. 94035
- Bureau of Commercial Fisheries
 U.S. Fish & Wildlife Service
 P.O. Box 3830
 Honolulu, Hawaii 96812
- Laboratory Director
 Biological Laboratory
 Bureau of Commerical Fisheries
 P.O. Box 1155
 Juneau, Alaska 99801

- l Laboratory Director
 Biological Laboratory
 Bureau of Commerical
 Fisheries
 P.O. Box 6
 Woods Hole, Mass. 02543
- Laboratory Director
 Biological Laboratory
 Bureau of Commercial
 Fisheries
 P.O. Box 280
 Brunswick, Georgia 31521
- Laboratory Director
 Tuna Resources Laboratory
 Bureau of Commercial
 Fisheries
 P.O. Box 271
 La Jolla, Calif. 92038
- Bureau of Commercial
 Fisheries & Wildlife
 U.S. Fish & Wildlife Service
 Librarian
 Sandy Hook Marine Laboratory
 P.O. Box 428
 Highlands, New Jersey 07732
- Director
 National Oceanographic Data
 Center
 Washington, D.C. 20390
- l Laboratory Director
 Biological Laboratory
 Bureau of Commercial
 Fisheries
 #75 Virginia Beach Drive
 Miami, Florida 33149

MGG 0 1 9 9 5 0 0 1

- 1 Army Research Office Office of the Chief of R & D Department of the Army Washington, D.C. 20310
- U.S. Army Beach Erosion Board
 5201 Little Falls Road, N.W.
 Washington, D.C. 20016
- Director
 U.S. Army Engineers Waterways
 Experiment Station
 Vicksburg, Miss. 49097
- 1 Attn: Research Center Library

OTHER GOVERNMENT AGENCIES

- Director
 Arctic Research Laboratory
 P.O. Box 1070
 Fairbanks, Alaska
- 1 Committee on Undersea Warfare National Academy of Science 2101 Constitution Ave., N.W. Washington, D.C.
- 20 Defense Documentation Center Cameron Station Alexandria, Virginia 20305
- 2 National Research Council 2101 Constitution Ave., N.W. Washington, D.C. 20418 Attn: Committee on Undersea Warfare

Attn: Committee on Oceanography

- Laboratory Director
 California Current Resources
 Laboratory
 Bureau of Commercial
 Fisheries
 P. O. Box 271
 La Jolla, Calif. 92038
- 1 Director
 Coast & Geodetic Survey U.S. ESSA
 Attn: Office of Hydrography &
 Oceanography
 Washington Science Center
 Rockville, Maryland 20852
- Director
 Atlantic Marine Center
 Coast & Geodetic Survey U.S. ESSA
 439 West York Street
 Norfolk, Virginia 23510
- Director, ESSA
 Institute for Oceanography
 901 South Miami Ave.
 Miami, Florida 33130
- Commanding Officer
 Coast Guard Oceanographic
 Unit
 Bldg. 159, Navy Yard Annex
 Washington, D.C. 20390

is

MGG 0 1 9 9 5 0 0 1

- Director, Bureau of Commercial
 Fisheries
 U.S. Fish & Wildlife Service
 Dept. of the Interior
 Washington, D.C. 20240
- Bureau of Commercial Fisheries 1
 Biological Laboratory, Oceanography
 2725 Montlake Boulevard, East
 Seattle, Washington 98102
- Dr. Gene A. Rusnak
 U.S. Geological Survey
 Marine Geology & Hydrology
 345 Middlefield Road
 Menlo Park, Calif. 94025
- Assistant Director
 Oceanography Museum of
 Natural History
 Smithsonian Institution
 Washington, D. C. 20560
- Agency
 The Pentagon
 Washington, D.C. 20310
 Attn: Nuclear Test Detection
 Office

1 Advanced Research Projects

RESEARCH LABORATORIES

2 Director Woods Hole Oceanographic Institution Woods Hole, Mass. 02543

- 1 Director
 Narragansett Marine
 Laboratory
 Univ. of Rhode Island
 Kingston, Rhode Island 02881
 - Gulk Coast Research
 Laboratory
 Ocean Springs, Mississippi
 39564
 Attn: Librarian
- Bell Telephone Laboratories, Inc. Whippany, New Jersey Attn: Dr. W.A. Tyrrell
- 1 Chairman, Dept. of Meteorology & Oceanography New York University New York, N.Y. 10453
- 1 Director Lamont Geological Observatory Columbia University Palisades, New York 10964
- Director
 Hudson Laboratories
 145 Palisade Street
 Dobbs Ferry, New York 10522
- Resident Rep.
 Office of Naval Research
 Hudson Laboratories
 145 Palisade Street
 Dobbs Ferry, New York
 10522

MGG 0 1 9 9 5 0 0 1

- 1 Great Lakes Research Division Institute of Science & Technology University of Michigan Ann Arbor, Michigan 48105
- Department of Physics
 Northern Michigan Univ.
 Marquette, Michigan 49855
- Director
 Chesapeake Bay Institute
 John Hopkins University
 Baltimore, Maryland 21218
- Allan Hancock Foundation University Park Los Angeles, Calif. 90007
- 1 Marine Physical Laboratory University of California San Diego, Calif.
- 1 Head, Department of Oceanography Oregon State University Corvallis, Oregon 97331
- 1 Defense Research Laboratory University of Texas Austin, Texas Via: ONR Resident Rep.
- 1 Head, Department of Oceanography University of Washington Seattle, Washington 98105
- 1 Director
 Hawaiian Marine Laboratory
 University of Hawaii
 Honolulu, Hawaii 96825

- Department of Engineering University of California Berkeley, Calif. 94720
- 1 Applied Physics Laboratory University of Washington 1013 N. E. Fortieth Street Seattle, Washington 98105
- Physical Oceanographic
 Laboratory
 Nova University
 1786 S. E. Fifteenth Ave.
 Fort Lauderdale, Fla. 33316
- 1 Serials Department University of Illinois Library Urbana, Ill. 61801
- 1 Department of Geophysical Sciences University of Chicago Chicago, Ill. 60637
- Coastal Engineering Laboratory University of Florida Gainesville, Florida 32601
- 1 Marine Science CenterLehigh UniversityBethlehem, Penna. 18015
- I Institute of Geophysics Univ. of Hawaii Honolulu, Hawaii 96825
- 1 Mr. H. A. Gast
 Wildlife Building
 Humboldt State College
 Arcata, Calif. 95521

MGG 0 1 9 9 5 0 0 1

- Department of Geology & Geophysics Massachusetts Institute of Technology Cambridge, Mass. 02139
- 1 Division of Engineering & Applied Physics
 Harvard University
 Cambridge, Mass. 02138
- 1 Department of Geology Yale University New Haven, Conn. 06520
- Westinghouse Electric Corp.
 1625 K Street N. W.
 Washington, D. C. 20006
- 1 Director Institute of Marine Sciences University of Alaska College, Alaska 99735
- Director, Marine Laboratory
 University of Miami
 #1 Rickenbacker Causeway
 Miami, Florida 33149
- 1 University of Connecticut Southeastern Branch, Avery Point Groton, Conn. 06330 Attn: Library Staff

Security Classification

DOCUMENT CO (Security classification of title, body of abstract and index	NTROL DATA + R&I) torod when	the overall separt is classified)					
1. ORIGINATING ACTIVITY (Corporate author)			RT SECURITY CLASSIFICATION					
Lamont Geological Observatory		Un	classified					
Columbia University Palisades, New York		2 5. GROU						
3. REPORT TITLE								
ACOUSTIC PROVINCES OF THE NOR	TH PACIFIC BA	SED O	N DEEP-SEA CORES					
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)								
Technical Report								
Horn, David R., Horn, Barbara l	M., Delach, Ma	rilyn N	٧.					
6. REPORT DATE	74. TOTAL NO. OF PA	OE9	76. NOI OF REFS					
December 1967	39		20					
84. CONTRACT OR GRANT NO.	94. GRIGINATORIA REI							
N00024-67-C-1186	Technical	Report	t No. 3 CU-3-67					
g.	96. OTHER REPORT N	OTHER REPORT NO(5) (Any other numbers that may be assigned						
d.	thie report)							
10. A VA IL ABILITY/LIMITATION NOTICES								
Distribution of this document is ur	nlimited							
11. SUPPLEMENTARY NOTES	12. SPONSORING MILIT	ARY ACTIV	/ITY					
			stems Command Code 00V1-K					

13. ABSTRACT

A preliminary survey of sub-bottom reflectors contained in 261 sediment cores from the North Pacific reveals that they are restricted to certain areas of the sea floor. Their distribution is given. Because they are of limited extent and possess different sonic properties, they are considered acoustic provinces. The sea floor of the North Pacific includes 3 such regions:

- 1) the Japan Acoustic Province, 2) the Aleutian-Alaska Acoustic Province and
- 3) the Central North Pacific Acoustic Province

Off Japan and the Kurils, sub-bottom reflectors are ash layers; south and west of the Aleutians and Alaska they are silts and sands deposited by turbidity currents; whereas in the central North Pacific reflectors are rare. Surficial sediment is only useful as an index to the relectivity of the bottom within the Central North Pacific Acoustic Province.

u Unclassified

Security Classification

LINK A LINK B	LINK C			
ROLE	WT	ROLE	WT	
ROLE	WT	ROLE	WT	
ROLE	ROLE	ROLE	ROLE	ROLE
ROLE	ROLE	ROLE	ROLE	ROLE
ROLE	ROLE	ROLE	ROLE	
ROLE	ROLE	ROLE	ROLE	

INSTRUCTIONS

- 1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
- 3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
- 4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
- 5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
- 6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7s. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.
- 8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. OTHER REPORT NUMBER(\$): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
- 10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

- 11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.
- 12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.
- 13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS). (S). (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

GPO 886-551

Unclassified

This file contains <u>(a</u> oversize maps and/or charts which were not scanned. These maps and/or charts may be viewed in the original paper report or in the microfiche copy.	